

Full Moon Trimless

500 - 700 - 900

Type Lounge
 Mounting Recessed
 Material Aluminium + Polycarbonate (850°C)
 El. class / IP Class I / IP20

Warranty: see p.282


Philips Fortimo LED Module HV

LED Module(s) included
 Driver(s) included

CCT 3000K / 4000K
 CRI Ra90
 LED efficacy 133lm/W / 141lm/W
 SDCM 3

Build-in depth:
 Full Moon 500: min. 160mm
 Full Moon 700: min. 175mm
 Full Moon 900: min. 200mm

Cut-out Diameter:
 Full Moon 500: Ø525mm
 Full Moon 700: Ø725mm
 Full Moon 900: Ø925mm

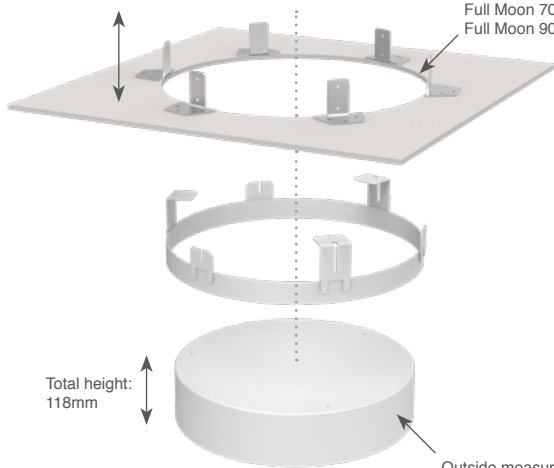

Total height:
 118mm

Outside measurements:
 Ø 500mm
 Ø 700mm
 Ø 900mm




Carehome of the Future - Beliën Architects

Options

Integrated Emergency Lighting

Standard - 1 Hour	659.24.LED-1
Standard - 3 Hours	659.24.LED-3
DALI - 1 Hour	659.26.LED-1
DALI - 3 Hours	659.26.LED-3

Both standard and DALI systems are equipped with self-testing.
 DALI version with on command testing, status read-out and additional functionality.



Standard diffusion
 Optimal diffusion
 More info see p.280



Full Moon Trimless 500

Standard diffusion - 4400lm - 31.2W
 Non dimmable 151.LED-S.CCC.xx
 1-10V dimmable 151.LED-S.CCC.xx-D
 Touch & DALI dim. 151.LED-S.CCC.xx-TD

Optimal diffusion - 8250lm - 58.5W
 Non dimmable 151.LED-H.CCC.xx
 1-10V dimmable 151.LED-H.CCC.xx-D
 Touch & DALI dim. 151.LED-H.CCC.xx-TD

Ra80 - 3000K: 000.000-0.830.00
 Ra80 - 4000K: 000.000-0.840.00
 Ra90 - 3000K: 000.000-0.930.00
 Ra90 - 4000K: 000.000-0.940.00



Full Moon Trimless 700

Standard diffusion - 8800lm - 62.4W
 Non dimmable 171.LED-S.CCC.xx
 1-10V dimmable 171.LED-S.CCC.xx-D
 Touch & DALI dim. 171.LED-S.CCC.xx-TD

Optimal diffusion - 16500lm - 117W
 Non dimmable 171.LED-H.CCC.xx
 1-10V dimmable 171.LED-H.CCC.xx-D
 Touch & DALI dim. 171.LED-H.CCC.xx-TD

Ra80 - 3000K: 000.000-0.830.00
 Ra80 - 4000K: 000.000-0.840.00
 Ra90 - 3000K: 000.000-0.930.00
 Ra90 - 4000K: 000.000-0.940.00



Full Moon Trimless 900

Standard diffusion - 14300lm - 101.4W
 Non dimmable 191.LED-S.CCC.xx
 1-10V dimmable 191.LED-S.CCC.xx-D
 Touch & DALI dim. 191.LED-S.CCC.xx-TD

Optimal diffusion - 29700lm - 210.6W
 Non dimmable 191.LED-H.CCC.xx
 1-10V dimmable 191.LED-H.CCC.xx-D
 Touch & DALI dim. 191.LED-H.CCC.xx-TD

Ra80 - 3000K: 000.000-0.830.00
 Ra80 - 4000K: 000.000-0.840.00
 Ra90 - 3000K: 000.000-0.930.00
 Ra90 - 4000K: 000.000-0.940.00

Available colors: 000.000-0.000.xx
 Other RAL colors on request



White Matt Text.
Standard



Grey Matt Text.
Standard



Black Matt Text.
Standard



Carehome of the Future - Bellön Architects



Mercken accountants - Architect Jamaer



Full Moon Interior

Technics:

- Doxis only uses solid LED boards and electronic drivers made by Philips
- Optional emergency modules can be installed
- 5 Year Warranty

1. *Emergency battery (1 and 3 hours available)*
2. *Emergency module*
3. *Philips LED boards*
4. *Philips drivers*