

Full Moon

900 - 1100

Type Lounge
 Mounting Surface mounted / Suspended
 Material Aluminium + Polycarbonate (850°C)
 El. class / IP Class I / IP20



Warranty: see p.282

Philips Fortimo LED Module HV

LED Module(s) included
 Driver(s) included
 CCT 3000K / 4000K
 CRI Ra90
 LED efficacy 133lm/W / 141lm/W
 SDCM 3

Suspension set optional:

Ceiling box in selected color incl.
 Strain relief integrated
 Set color white: white textile cable
 Set color black, brown, corten: black textile cable
 Set color grey: grey textile cable
 Three(900)/Four(1100) suspension wires + textile power cable

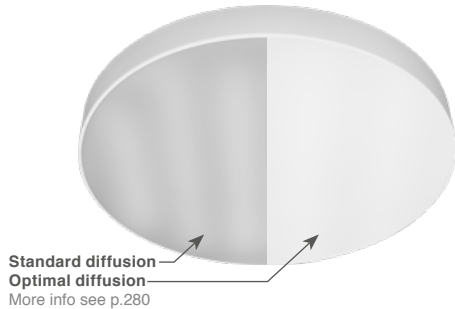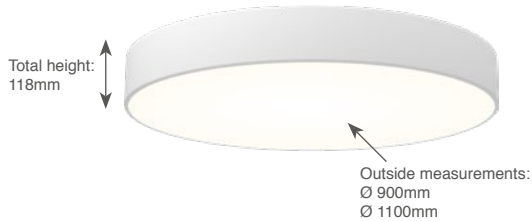

Optional suspension set

Suspension set Full Moon 900 (3 suspensions)

Set 2000mm - 3x0.75mm² 101.33.xx-2
 Set 4000mm - 3x0.75mm² 101.33.xx-4
 Set 2000mm - 5x0.75mm² 101.35.xx-2
 Set 4000mm - 5x0.75mm² 101.35.xx-4

Suspension set Full Moon 1100 (4 suspensions)

Set 2000mm - 3x0.75mm² 101.43.xx-2
 Set 4000mm - 3x0.75mm² 101.43.xx-4
 Set 2000mm - 5x0.75mm² 101.45.xx-2
 Set 4000mm - 5x0.75mm² 101.45.xx-4

Available colors: 000.00.xx-0

Suspension set color

Matt White Texture	01	standard
Matt Black Texture	03	standard
Matt Anthracite Texture	07	standard
Matt Grey Texture	18	standard
Smoked Brown Texture	25	
Corten	15	

Custom colors available on request

Options

Integrated Emergency Lighting

Standard - 1 Hour	659.24.LED-1
Standard - 3 Hours	659.24.LED-3
DALI - 1 Hour	659.26.LED-1
DALI - 3 Hours	659.26.LED-3

Both standard and DALI systems are equipped with self-testing.
 DALI version with on command testing, status read-out and additional functionality.

On request

Recessed connecting box (more info on p.279)
 Trimless connecting box (more info on p.279)



Full Moon 900

Standard diffusion - 14300lm - 101.4W

Non dimmable	190.LED-S.CCC.xx
1-10V dimmable	190.LED-S.CCC.xx-D
Touch & DALI dim.	190.LED-S.CCC.xx-TD

Optimal diffusion - 29700lm - 210.6W

Non dimmable	190.LED-H.CCC.xx
1-10V dimmable	190.LED-H.CCC.xx-D
Touch & DALI dim.	190.LED-H.CCC.xx-TD

Ra80 - 3000K: 000.000-0.	830.00
Ra80 - 4000K: 000.000-0.	840.00
Ra90 - 3000K: 000.000-0.	930.00
Ra90 - 4000K: 000.000-0.	940.00



Full Moon 1100

Standard diffusion - 22000lm - 156W

Non dimmable	1100.LED-S.CCC.xx
1-10V dimmable	1100.LED-S.CCC.xx-D
Touch & DALI dim.	1100.LED-S.CCC.xx-TD

Optimal diffusion - 44550lm - 316W

Non dimmable	1100.LED-H.CCC.xx
1-10V dimmable	1100.LED-H.CCC.xx-D
Touch & DALI dim.	1100.LED-H.CCC.xx-TD

Ra80 - 3000K: 000.000-0.	830.00
Ra80 - 4000K: 000.000-0.	840.00
Ra90 - 3000K: 000.000-0.	930.00
Ra90 - 4000K: 000.000-0.	940.00

Available colors: 000.000-0.000.xx
Other RAL colors on request



01

White Matt Text.
Standard



18

Grey Matt Text.
Standard



03

Black Matt Text.
Standard



07

Anthracite



25

Smoked Brown Text.



15


Corten



Carehome of the Future - Bellön Architects



Mercken accountants - Architect Jamaer

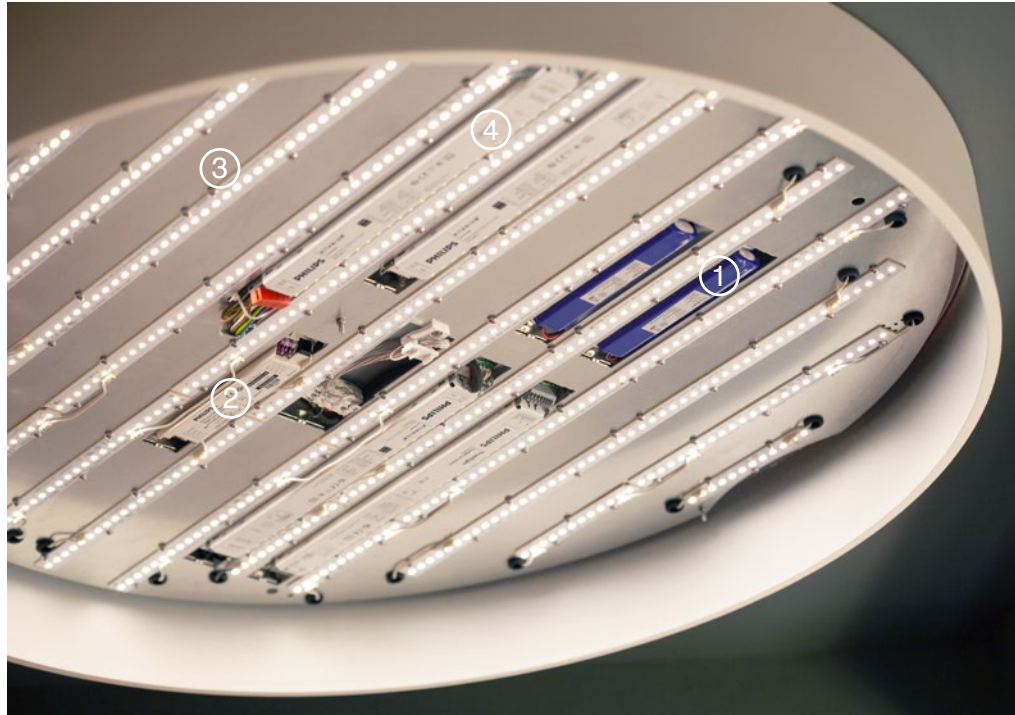

Full Moon Interior

Technics:

- Doxis only uses solid LED boards and electronic drivers made by Philips
- Optional emergency modules can be installed
- 5 Year Warranty

1. *Emergency battery (1 and 3 hours available)*
2. *Emergency module*
3. *Philips LED boards*
4. *Philips drivers*