


# Driver 350/500/700mA DALI dimmable

art. nr. 490.26.20

Independent LED driver

# DOXIS

LIGHTING FACTORY

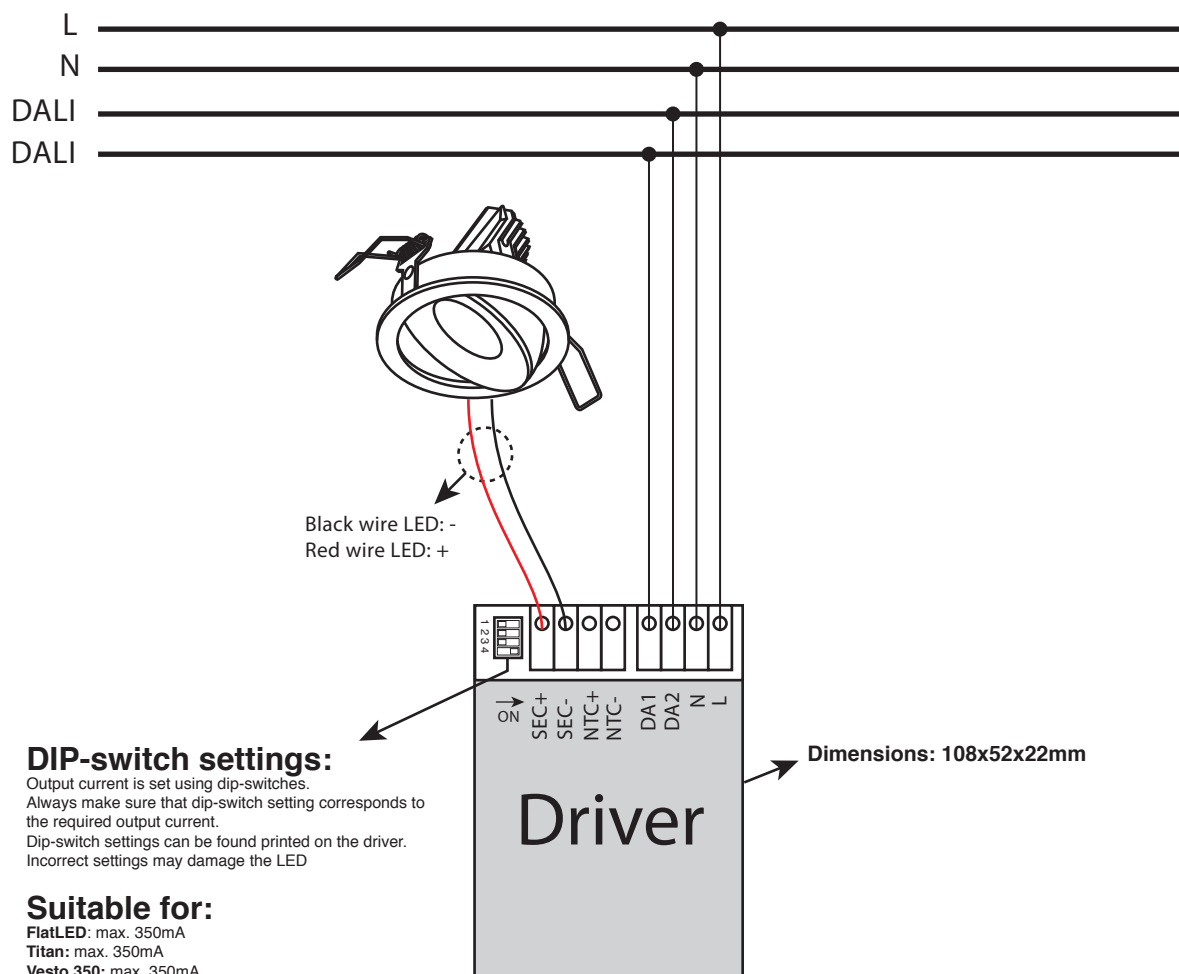

## DIP-switch settings:

Output current is set using dip-switches.  
Always make sure that dip-switch setting corresponds to the required output current.  
Dip-switch settings can be found printed on the driver.  
Incorrect settings may damage the LED

## Suitable for:

FlatLED: max. 350mA  
Titan: max. 350mA  
Vesto 350: max. 350mA  
Vesto 500: max. 500mA  
Tekton 45: max. 350mA  
Tekton 65: max. 350mA

## Installation information:

- Wire section 0.5-1.5mm<sup>2</sup>  
- Max 15m distance from driver to LED

### - Max. nr. of drivers on single circuit:

MCB 10A type B: 30	MCB 10A type C: 50
MCB 16A type B: 50	MCB 16A type C: 80
MCB 20A type B: 60	MCB 20A type C: 100
MCB 25A type B: 75	MCB 25A type C: 120

Inrush current: 5A  
Inrush current 1/2 value time (Twidth): 50μs  
Power factor (λ max): 0.95

Only to be installed by a qualified electrician.

Doxis cannot be held responsible for damage caused by incorrect settings or incorrect installation.

Document updated 09/12/2019. This document is subject to change.

## A05