


Titan

Surface Mounted

Type	Downlight
Mounting	Surface Mounted
Material	Aluminium
Adjustable	Yes (90°/359°)
El. class / IP	Class I / IP20
Warranty: see p.348	

Bridgelux Vero 10 LED (350mA)

CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)

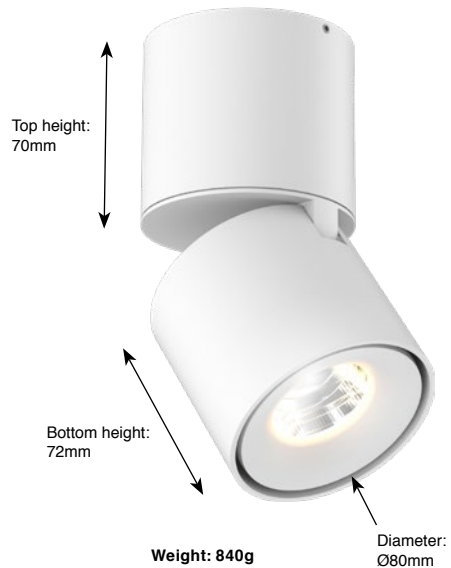

Ceiling mounting on horizontal ceilings only!

- driver integrated in luminaire
- included in article number and price

Data sheets and wiring guide: see website

On Request

LED with CRI Ra97
Class A LED



Titan Surface Mounted

Cone

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1205.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1205.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1205.AA.24.940.XX

Touch & DALI dim*

2700K - Ra90 - 10.2W - 937lm	1205.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1205.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1205.AA.26.940.XX

Mains dim (Trailing Edge only)

2700K - Ra90 - 10.2W - 937lm	1205.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1205.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1205.AA.27.940.XX

*When dimming with touch. Do not combine with other touch dim products



Titan Surface Mounted

Organic

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1204.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1204.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1204.AA.24.940.XX

Touch & DALI dim*

2700K - Ra90 - 10.2W - 937lm	1204.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1204.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1204.AA.26.940.XX

Mains dim (Trailing Edge only)

2700K - Ra90 - 10.2W - 937lm	1204.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1204.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1204.AA.27.940.XX



Titan Surface Mounted

Anti-Glare

PRICES INCL. BUILT-IN DRIVER

Non dim

2700K - Ra90 - 10.2W - 937lm	1206.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1206.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1206.AA.24.940.XX

Touch & DALI dim*

2700K - Ra90 - 10.2W - 937lm	1206.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1206.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1206.AA.26.940.XX

Mains dim (Trailing Edge only)

2700K - Ra90 - 10.2W - 937lm	1206.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1206.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1206.AA.27.940.XX

28° Reflector: 0000.28.00.000.00
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX
Other RAL colors on request



01
White Matt Text.
Standard



18
Grey Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text.
Standard



11
Black + Gold Matt
Standard



16
Gold Matt
Standard