

Titan Trimless

Standard

Type Trimless downlight
 Mounting Trimless
 Material Aluminium
 Adjustable Yes (40°/359°)
 El. class / IP Class III / IP20
 El. class driver Class II
 Warranty: see p.348

Bridgelux Vero 10 LED (350mA)

CCT 2700K / 3000K / 4000K
 CRI Ra90 (Ra80 on request)
 SDCM 3
 Luminous Flux LED
 2700K - Ra90: 1100lm (124lm/W)
 3000K - Ra90: 1156lm (130lm/W)
 4000K - Ra90: 1172lm (132lm/W)
 Luminous Flux System
 2700K - Ra90: 937lm (92lm/W)
 3000K - Ra90: 984lm (96lm/W)
 4000K - Ra90: 998lm (98lm/W)
 Beam angle 28° / 40°
 LED Power 8.9W / 350mA (excl. driver)
 System Power 10.2W / 350mA (incl. driver)
 Forward voltage 23V (min.) - 25.5V (typ.) - 28V (max.)

Bridgelux Dim-to-warm LED (more info see p.330)

CCT Dim-to-warm 1800-3000K
 CRI Ra90
 Luminous Flux LED: 860lm - System: 732lm
 LED Power 8.2W / 250mA (excl. driver)
 System Power 9.4W / 250mA (incl. driver)


DIM TO WARM



Spot dimensions: Ø84mm x height 68mm

Trimless gypkit included

Adjustable ceiling
 thickness 9-18mm

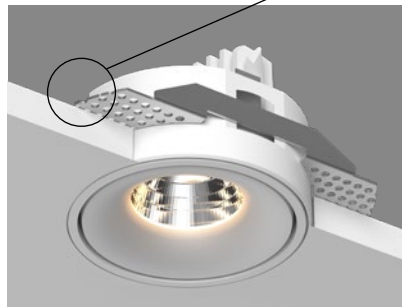

Weight: 360g
 (excl. driver)



Driver:

- Included in article number and included in price
- External/Remote installation





Data sheets and wiring guide: see website
 Driver information: see p.334-335

On Request

LED with CRI Ra97
 Class A LED

Air circulation notice:

Do not topload with insulation materials

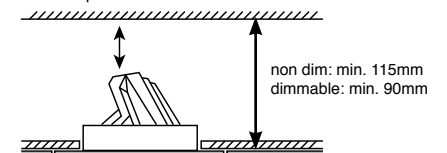



Titan Trimless Standard

Cone

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1016.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1016.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1016.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1016.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1016.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1016.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1016.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1016.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1016.AA.26.940.XX

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1016.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1016.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1016.AA.27.940.XX

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1016.AA.26.dtw.XX
-------------------------------	-------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1016.AA.27.dtw.XX
--------------------------------	-------------------



Titan Trimless Standard

Organic

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1017.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1017.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1017.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1017.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1017.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1017.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1017.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1017.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1017.AA.26.940.XX

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1017.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1017.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1017.AA.27.940.XX

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1017.AA.26.dtw.XX
-------------------------------	-------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1017.AA.27.dtw.XX
--------------------------------	-------------------



Titan Trimless Standard

Anti-glare

TRIMLESS KIT INCLUDED

PRICES INCL. DRIVERS

Non dim (Driver 490.24.16 incl.)

2700K - Ra90 - 10.2W - 937lm	1018.AA.24.927.XX
3000K - Ra90 - 10.2W - 984lm	1018.AA.24.930.XX
4000K - Ra90 - 10.2W - 998lm	1018.AA.24.940.XX

1-10V dim & Push dim (Driver 490.25.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1018.AA.25.927.XX
3000K - Ra90 - 10.2W - 984lm	1018.AA.25.930.XX
4000K - Ra90 - 10.2W - 998lm	1018.AA.25.940.XX

DALI dim (Driver 490.26.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1018.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1018.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1018.AA.26.940.XX

Mains dim (Driver 490.27.20 incl.)

2700K - Ra90 - 10.2W - 937lm	1018.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1018.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1018.AA.27.940.XX

DALI dim / Dim to Warm 1800-3000K (Driver 490.26.20 incl.)

DTW (DALI dim) - 9.4W - 732lm	1018.AA.26.dtw.XX
-------------------------------	-------------------

Mains dim / Dim to Warm 1800-3000K (Driver 497.27.20 incl.)

DTW (mains dim) - 9.4W - 732lm	1018.AA.27.dtw.XX
--------------------------------	-------------------

28° Reflector: 0000.28.00.000.00

40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX

Other RAL colors on request




01
White Matt Text.
Standard




18
Grey Matt Text.
Standard




07
Anthracite Matt Text.
Standard



03
Black Matt Text.
Standard



25
Smoked Brown Text.
Standard



16
Gold Matt
Standard