

# Tunnel T2

## Round

Type Lounge  
 Mounting Suspended  
 Material Polycarbonate (850°C)  
 White Powdercoated aluminium end plates  
 E.I. class / IP Class I / IP20  
 Warranty: see p.348

### Module Tunnel 600 - Philips Fortimo LED Line HV

Luminous Flux 3000K - Ra80: 4832lm (163lm/W)  
 LED 4000K - Ra80: 5200lm (176lm/W)  
 Luminous Flux 3000K - Ra80: 3983lm (113lm/W)  
 System 4000K - Ra80: 4286lm (122lm/W)  
 LED power 29.6W (excl. driver)  
 System power 35.2W (incl. driver)

### Module Tunnel 900 - Philips Fortimo LED Line HV


Luminous Flux 3000K - Ra80: 7248lm (163lm/W)  
 LED 4000K - Ra80: 7800lm (176lm/W)  
 Luminous Flux 3000K - Ra80: 5976lm (113lm/W)  
 System 4000K - Ra80: 6430lm (122lm/W)  
 LED power 44.4W (excl. driver)  
 System power 52.9W (incl. driver)

### Module Tunnel 1200 - Philips Fortimo LED Line HV

Luminous Flux 3000K - Ra80: 9664lm (163lm/W)  
 LED 4000K - Ra80: 10400lm (176lm/W)  
 Luminous Flux 3000K - Ra80: 7966lm (113lm/W)  
 System 4000K - Ra80: 8573lm (122lm/W)  
 LED power 59.2W (excl. driver)  
 System power 70.5W (incl. driver)

### Downlight module - Citizen CLU LED (350mA)

CCT 3000K / 4000K  
 CRI Ra90  
 SDCM 3  
 Luminous flux 3000K - Ra90: 1577lm (139lm/W)  
 LED 4000K - Ra90: 1601lm (142lm/W)  
 Luminous Flux 3000K - Ra90: 1388lm (107lm/W)  
 System 4000K - Ra90: 1409lm (108lm/W)  
 Beam angle 43°  
 LED Power 11.3W / 350mA (excl. driver)  
 System Power 12.9W / 350mA (incl. driver)  
 Current 350mA

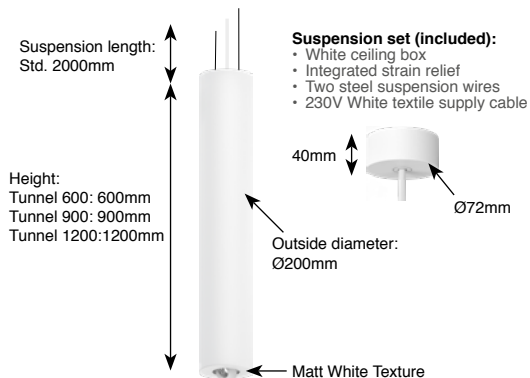

### Separate circuits:

- Diffuse light (Tunnel) and downlight module (FlatLED T2) on separately switchable circuits

### Options

#### Suspension + Power cable 4000mm

Suspension + 3x0.75mm<sup>2</sup> 102.23.01-4

Suspension + 5x0.75mm<sup>2</sup> 102.25.01-4

### On request

Recessed connecting box (more info on p.340/p.346)

Trimless connecting box (more info on p.340/p.346)



Tunnel 600 T2  
Round

**Philips Fortimo LED Line 5200lm + FlatLED T2**  
3000K - Ra80 - Non dimmable 1265.00.24.830.01  
3000K - Ra80 - Touch & DALI dim. 1265.00.26.830.01  
4000K - Ra80 - Non dimmable 1265.00.24.840.01  
4000K - Ra80 - Touch & DALI dim. 1265.00.26.840.01



Tunnel 900 T2  
Round

**Philips Fortimo LED Line 7800lm + FlatLED T2**  
3000K - Ra80 - Non dimmable 1266.00.24.830.01  
3000K - Ra80 - Touch & DALI dim. 1266.00.26.830.01  
4000K - Ra80 - Non dimmable 1266.00.24.840.01  
4000K - Ra80 - Touch & DALI dim. 1266.00.26.840.01



Tunnel 1200 T2  
Round

**Philips Fortimo LED Line 10400lm + FlatLED T2**  
3000K - Ra80 - Non dimmable 1267.00.24.830.01  
3000K - Ra80 - Touch & DALI dim. 1267.00.26.830.01  
4000K - Ra80 - Non dimmable 1267.00.24.840.01  
4000K - Ra80 - Touch & DALI dim. 1267.00.26.840.01