


**Titan 140/200**  
Suspended & Surface Mounted



**Instructions for suspended version:**

- 1a. Disassemble ceiling connecting box
- 2a. Mount bracket to ceiling
- 3a. Place cable through box
- 4a. Connect cable to 230V
- 5a. Reassemble ceiling connecting box and fix with screws on the side

**Instructions for surface mounted version:**

- 1b. Fix bracket to ceiling using screws
- 2b. Connect 230V to terminal block
- 3b. Connect luminaire LED wires to WAGO connectors
- 4b. Place luminaire over bracket and fix using screws on the side

Forward voltages and nominal drive currents are mentioned on the label supplied with the product or can be found in the technical datasheet of the product.

Always use the correct driver.


Always install the driver according to the wiring schematics supplied with the driver.

Always check if multi-current drivers are set to the correct output current.


Doxis Lighting Factory cannot be held responsible for damage caused by using the wrong driver.




**Suspended**

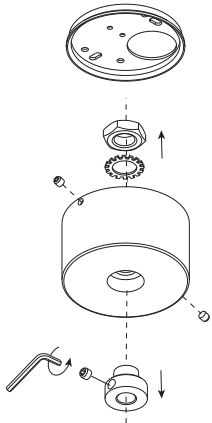




1a

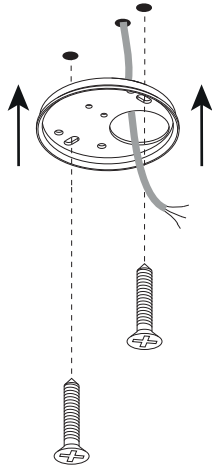


2a



3a

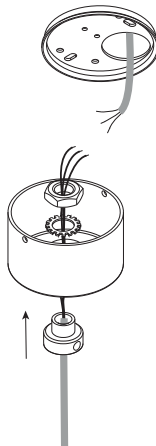


4a

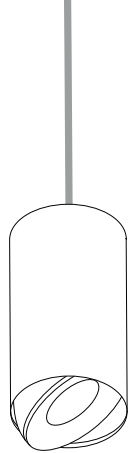


5a

**Surface Mounted**

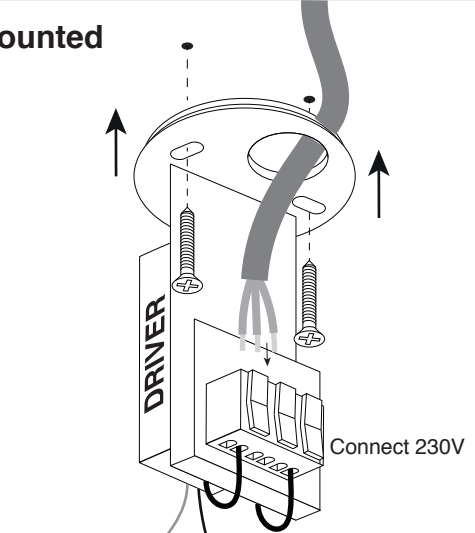


1b




2b

Connect LED:  
Red & Red wire  
Black & Black wire

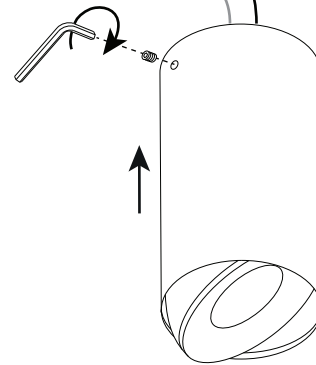

3b



4b

**Non dim & Mains dim**

|              |  |    |
|--------------|--|----|
| Brown        |  | L  |
| Yellow-Green |  | PE |
| Blue         |  | N  |

**1-10V dim**

|              |  |         |
|--------------|--|---------|
| Grey         |  | 1-10V - |
| Black        |  | 1-10V + |
| Yellow-Green |  | PE      |
| Blue         |  | N       |
| Brown        |  | L       |

**Push dim**

|              |  |            |
|--------------|--|------------|
| Black        |  | Push Btn L |
| Yellow-Green |  | PE         |
| Blue         |  | N          |
| Brown        |  | L          |

**DALI dim**

|              |  |      |
|--------------|--|------|
| Grey         |  | DA - |
| Black        |  | DA + |
| Yellow-Green |  | PE   |
| Blue         |  | N    |
| Brown        |  | L    |

**Attention!!**

Always follow the instructions described in this document and store this document for future reference.

Do not touch LED surface. Warranty void if LED contact has taken place.  
Only to be installed by a qualified electrician.

Always make sure power is completely switched off when working on luminaire.

**Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation, modification, reparation or incorrect application/usage of the product.**