


Forward voltages and nominal drive currents are mentioned on the label supplied with the product or can be found in the technical datasheet of the product.

Always use the correct driver.

Always install the driver according to the wiring schematics supplied with the driver.

Always check if multi-current drivers are set to the correct output current.

Doxis Lighting Factory cannot be held responsible for damage caused by using the wrong driver.

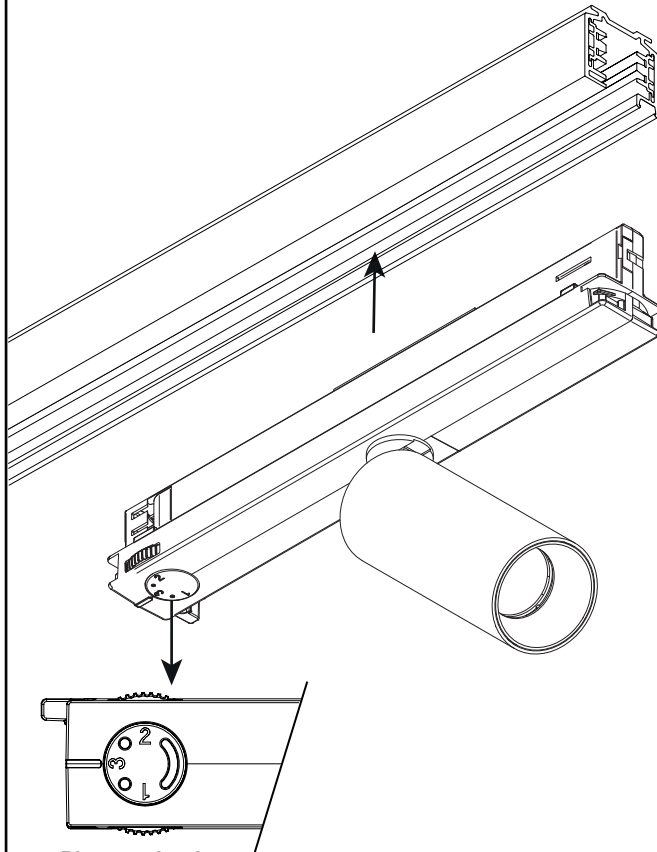

Phase selection

When the track is connected to a three-phase system it is possible to select the phase (L1, L2 or L3) to distribute the single luminaires in the system, by means of the proper selector of the adaptor.

Adapter mounting into the track non dim

Insert the adapter into the track, so that the mechanical key (A) in the adaptor matches the groove (B) in the track. Rotate of about 90° the lever of the cam (C) until it reaches the locking position.


To open rotate the lever the opposite direction.

Adapter mounting into the track DALI

Insert the adapter into the track, so that the mechanical key (A) in the adaptor matches the groove (B) in the track.

Rotate of about 90° the lever of the cam (C = mains and D = DALI-2) until it reaches the locking position.

To open rotate the lever the opposite direction.

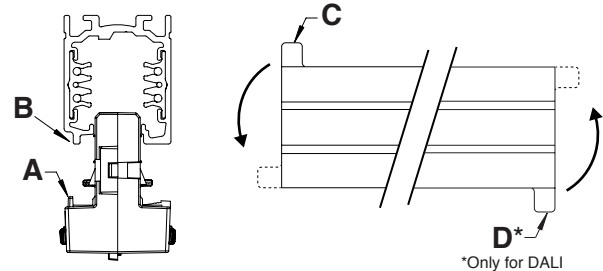

*Only for DALI

NON DIMMABLE VERSION IS EQUIPPED WITH A STANDARD ADAPTER (UNIVERSAL)

DALI COMPATIBILITY* (ONLY FOR DALI VERSION!!!)

Manufacturer	Type	System	Intrack casing colour
NORDIC ALUMINIUM	GLOBAL Trac Pulse XTSC 6xxx	3P + DALI	Black, white, grey
NORDIC ALUMINIUM	GLOBAL Trac Pulse XTSCF 6xxx	3P + DALI	Black, white, grey
Stucchi	One track	3P + DALI	Black, white, grey
Powergear	PRO-0610	3P + DALI	Black, white, grey
Unipro	TC32W	3P + DALI	Black, white, grey
Unipro	TC32FW	3P + DALI	Black, white, grey

*Tests have been done with in-tracks taken from the market in the first half of 2020

Doxis has no control or responsibility on any future or past possible changes made by different manufactures that could affect the compatibility between tracks and adapters.

⚠ Attention!!

Always follow the instructions described in this document and store this document for future reference.

Do not touch LED surface. Warranty void if LED contact has taken place.

Only to be installed by a qualified electrician.

Always make sure power is completely switched off when working on luminaire.

Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation, modification, reparation or incorrect application/usage of the product.