


This product contains a light source of energy efficiency class E



Instructions:

1. Remove base plate by loosening side screws and rotating the base plate counter-clockwise. A long allen key or extension tool might be needed.
2. Pull power cable through the center of the base plate. Fix base plate to ceiling using screws. Make sure to use the correct screws, plugs, etc. required for the specific ceiling type. Ceiling needs to be straight for a smooth installation.
3. Connect wiring to terminal block located on the base plate.
4. Mount housing back to base plate (repeat steps 1A-1B-1C in reverse order). Make sure wiring and safety cable does not get caught between base plate and housing.
5. Remove protective foil ON BOTH SIDES of the diffuser plate.
6. Insert diffuser into housing. Bend diffuser slightly and place inside housing.



Doxis Lighting Factory cannot be held responsible for damage caused by incorrect installation.

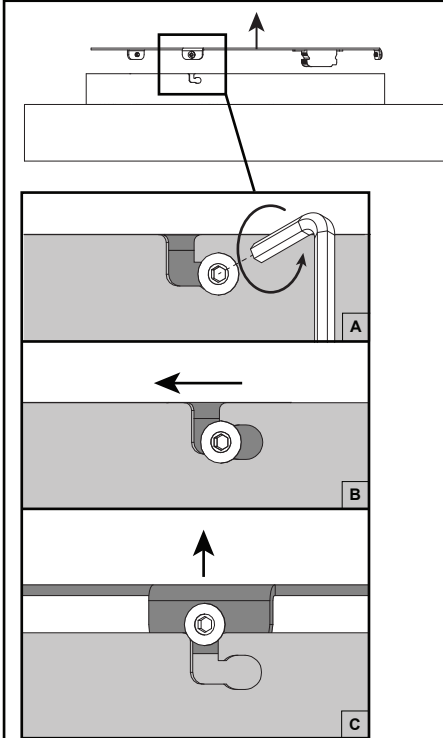


1

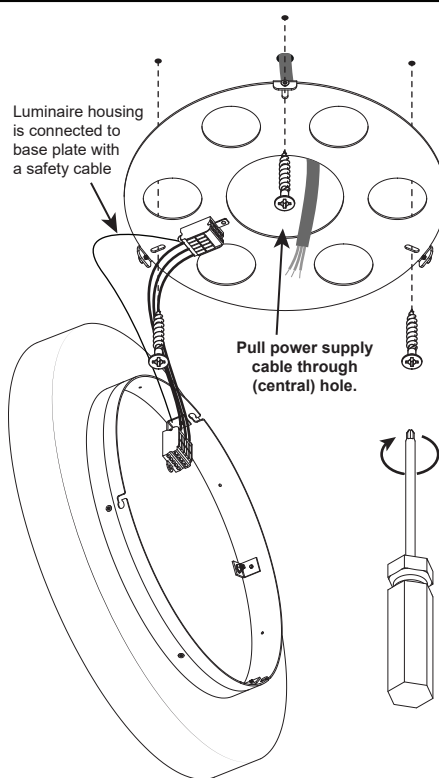


Mounting hole locations (r = Radius)
 Full Moon 600: r=150mm
 Full Moon 900: r=230mm

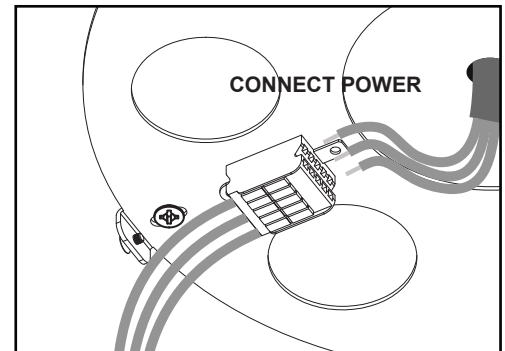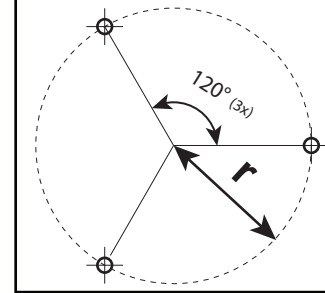

2

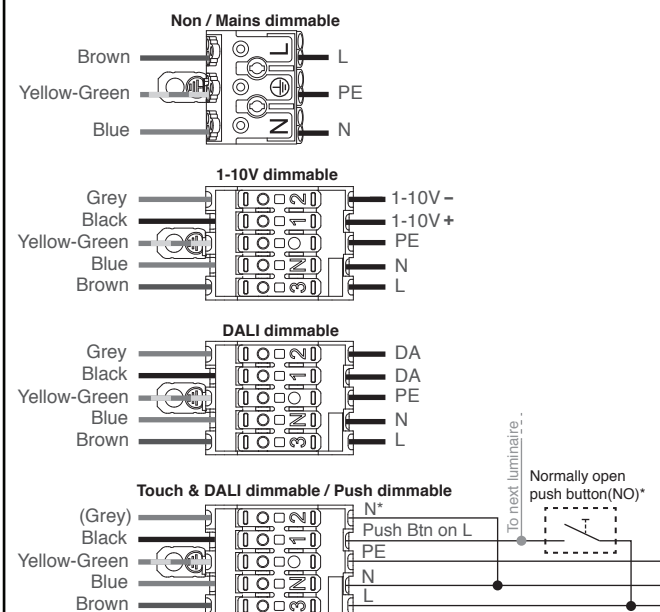


3

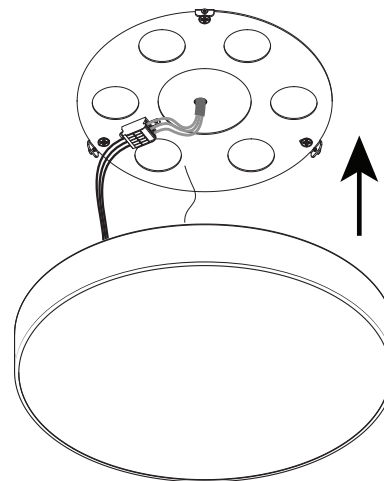


4

Remove protective foil on 2 SIDES

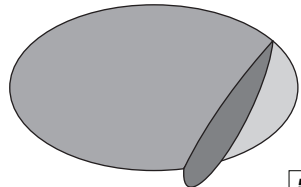

5

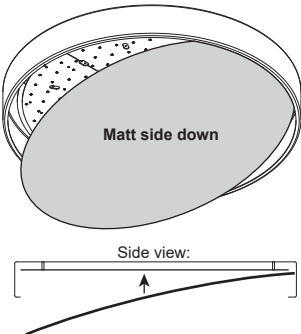

6

⚠ Attention!!

Always follow the instructions described in this document and store this document for future reference.

Do not touch LED surface. Warranty void if LED contact has taken place.

Only to be installed by a qualified electrician.

Always make sure power is completely switched off when working on luminaire.

Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation, modification, reparation or incorrect application/usage of the product.