


# Driver 350mA Non dimmable

Art. nr. 490.24.16

Independent LED driver

# DOXIS

LIGHTING FACTORY

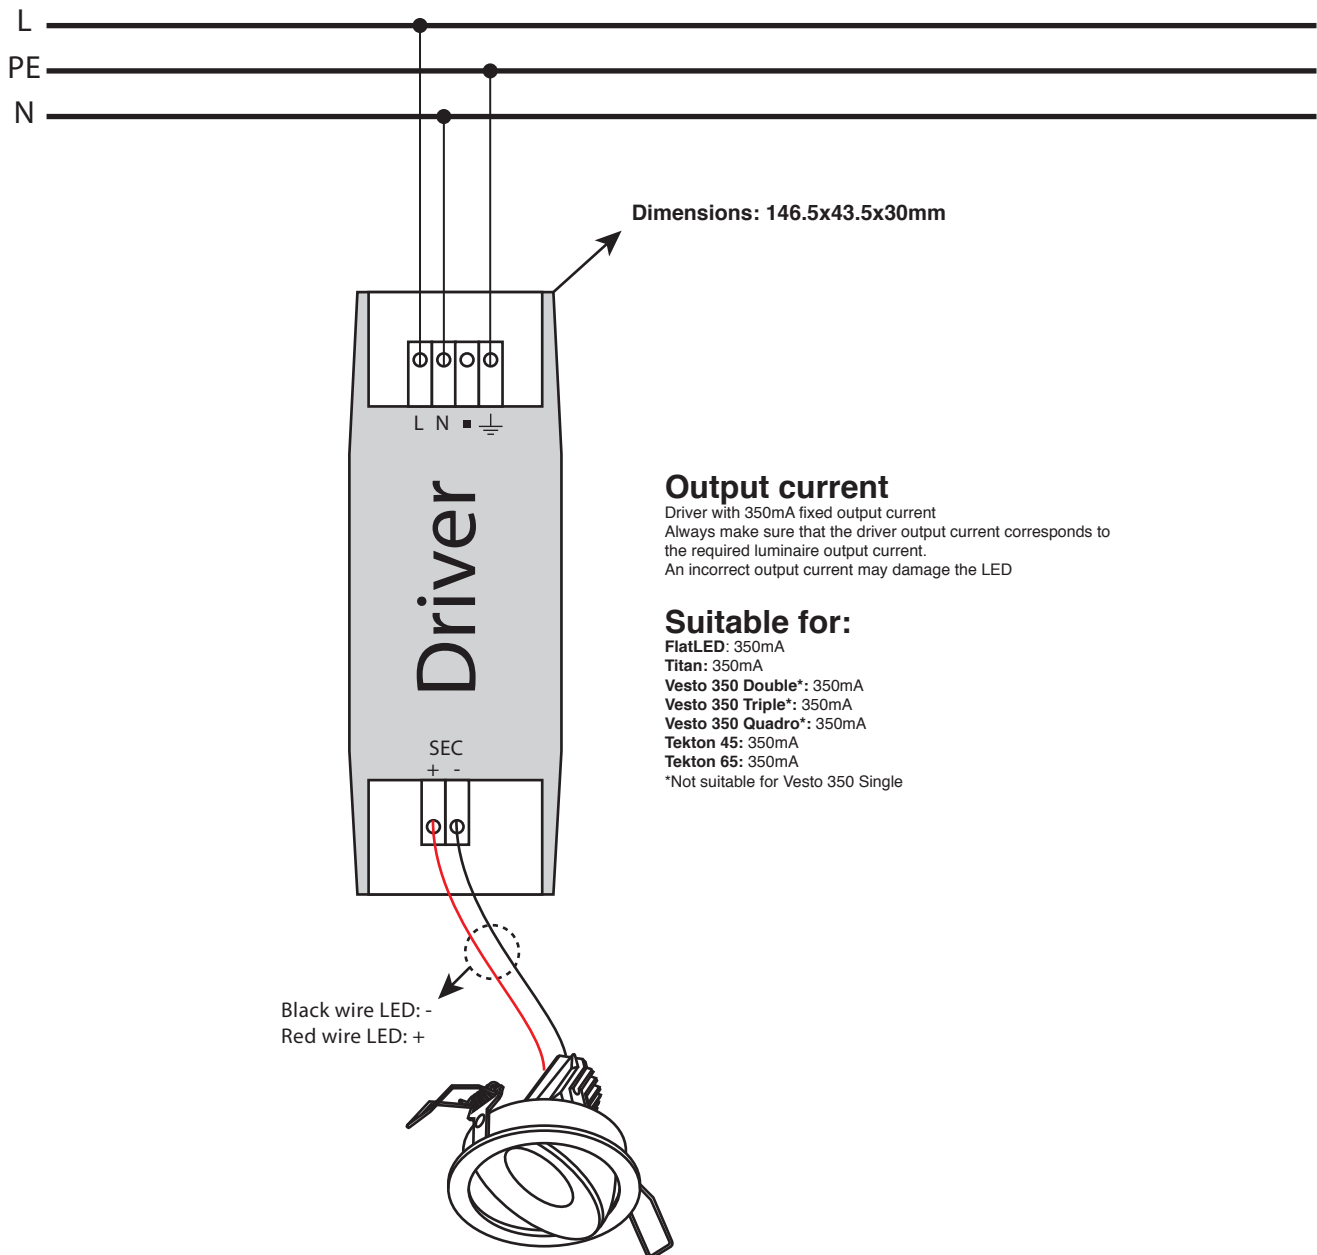

Dimensions: 146.5x43.5x30mm

## Output current

Driver with 350mA fixed output current  
Always make sure that the driver output current corresponds to the required luminaire output current.  
An incorrect output current may damage the LED

## Suitable for:

FlatLED: 350mA  
Titan: 350mA  
Vesto 350 Double\*: 350mA  
Vesto 350 Triple\*: 350mA  
Vesto 350 Quadro\*: 350mA  
Tekton 45: 350mA  
Tekton 65: 350mA  
\*Not suitable for Vesto 350 Single

## Installation information:

Wire section 0.5-1.5mm<sup>2</sup>

Max 15m distance from driver to LED

Max. nr. of drivers on single circuit:

MCB 10A type B: 30  
MCB 16A type B: 50  
MCB 20A type B: 60  
MCB 25A type B: 75

MCB 10A type C: 50  
MCB 16A type C: 80  
MCB 20A type C: 100  
MCB 25A type C: 120

Inrush current: 5A

Inrush current 1/2 value time (Twidth): 50µs

Power factor (λ max): 0.95

Only to be installed by a qualified electrician.

Doxis cannot be held responsible for damage caused by incorrect settings or incorrect installation.

Document updated 09/12/2019. This document is subject to change.

# A02