




General specs	
Type	Suspended / Surface Mounted
Material	Aluminium + Polycarbonate(850°)
Lamp	Philips Fortimo LED Module HV
Dimmable	Yes

IP20 850°C

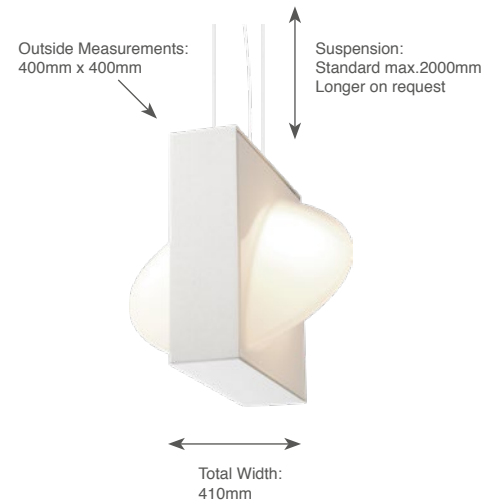

Features:
Suspended Lounge luminaire.
Power supplies / Control gear included.

Solar	Lightsource	LED Output*	LED Power	System Power	LED Efficacy*	Power supply	CCT	CRI	
Art. nr.	lm	W	W	lm/W	K	Ra			
LED 2500lm	142.24.2500.930	2x Philips Fortimo LED Module HV (incl.)	2360	14.0	15.9	168	Driver non dim (incl.)	3000	90
	142.25.2500.930	2x Philips Fortimo LED Module HV (incl.)	2360	14.0	15.9	168	Driver 1-10v dim (incl.)	3000	90
	142.26.2500.930	2x Philips Fortimo LED Module HV (incl.)	2360	14.0	15.9	168	Driver Touch & DALI dim (incl.)	3000	90
	142.24.2500.940	2x Philips Fortimo LED Module HV (incl.)	2500	14.0	15.9	178	Driver non dim (incl.)	4000	90
	142.25.2500.940	2x Philips Fortimo LED Module HV (incl.)	2500	14.0	15.9	178	Driver 1-10v dim (incl.)	4000	90
	142.26.2500.940	2x Philips Fortimo LED Module HV (incl.)	2500	14.0	15.9	178	Driver Touch & DALI dim (incl.)	4000	90

*Based on LED output excl. diffuser

Options

Suspension + White power cable 4000mm

Suspension + 3x0.75mm² 102.23.01-4
Suspension + 5x0.75mm² 102.25.01-4

On request

Recessed connecting box
Trimless connecting box
Black or grey textile power cable

Surface connecting box

White surface connecting box included
2 suspension wires + mounting accessories included
Strain relief integrated
White textile (polyester) power cable included
Standard length power cable: 2000mm



Lumen Maintenance		
L70	B50	>72000 hrs
	B20	>72000 hrs
	B10	>72000 hrs
L80	B50	>72000 hrs
	B20	>72000 hrs
	B10	>72000 hrs
L90	B50	52000 hrs
	B20	51000 hrs
	B10	50000 hrs