

# Tunnel 1200 T2 Round (+FlatLED T2)


Technical Datasheet

**DOXIS**  
LIGHTING FACTORY



General	
Type	Suspended
Material	Polycarbonate/Steel/Aluminium
Lamp Type	LED Module
Dimmable	Yes
Cooling	Passive
Energy Class	A++
Photobiol. Safety	RG1
Class	class I

IP20 960°C LED

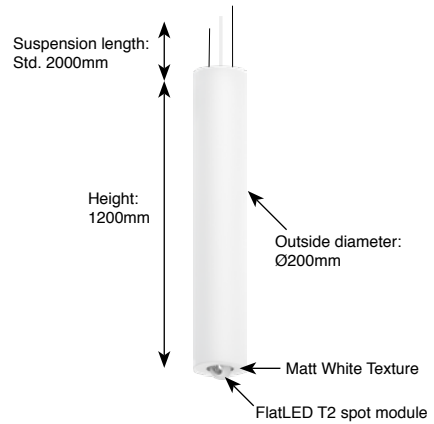


Specifications							
Art. nr.	Lightsource INCLUDED	CCT - CRI	Light output LED/Luminaire (lm)	Efficacy LED/Lumin.* (lm/W)	Power consumpt. LED/Lumin.*	Power supply INCLUDED	SDCM
1267.00.24.830.01	Philips Fortimo LED Line HV + FlatLED T2 spot module	3000K - Ra80	Tunnel: 9664 / 7966 Spot: 1577 / 1388	159 / 112	73.4W / 70.5W	Non dimmable driver	3
1267.00.26.830.01	Philips Fortimo LED Line HV + FlatLED T2 spot module	3000K - Ra80	Tunnel: 9664 / 7966 Spot: 1577 / 1388	159 / 112	73.4W / 70.5W	Touch & DALI dim. driver	3
1267.00.24.840.01	Philips Fortimo LED Line HV + FlatLED T2 spot module	4000K - Ra80	Tunnel: 10400 / 8573 Spot: 1601 / 1409	170 / 120	73.4W / 70.5W	Non dimmable driver	3
1267.00.26.840.01	Philips Fortimo LED Line HV + FlatLED T2 spot module	4000K - Ra80	Tunnel: 10400 / 8573 Spot: 1601 / 1409	170 / 120	73.4W / 70.5W	Touch & DALI dim. driver	3

\* Luminaire power consumption/efficacy values of are incl. driver

Lumen Maintenance Philips Fortimo LED Line 3R (Tc=40°C)		
L70B50: >50 000 hrs	L70B20: >50 000 hrs	L70B10: >50 000 hrs
L80B50: >50 000 hrs	L80B20: >50 000 hrs	L80B10: >50 000 hrs
L90B50: >50 000 hrs	L90B20: >50 000 hrs	L90B10: >50 000 hrs

## Suspension sets

### Suspension set 2000mm (INCLUDED):



- White ceiling box
- Integrated strain relief
- Two steel suspension wires
- 230V White textile supply cable

### Suspension set 4000mm (OPTIONAL):

- White 4000mm - 3x0.75mm<sup>2</sup> 102.23.01-4
- White 4000mm - 5x0.75mm<sup>2</sup> 102.25.01-4

#### On request:

- Recessed or trimless connection box
- Black or grey power cable