


1. Mount ceiling plate against ceiling.
2. Slide strain relief over cable and fix it to the cable
3. Slide ceiling box housing over cable
4. Fix strain relief to ceiling box housing using the nut
5. Connect power cable and place ceiling box housing over ceiling plate
6. Fix ceiling box housing to the ceiling plate using the screws on the sides

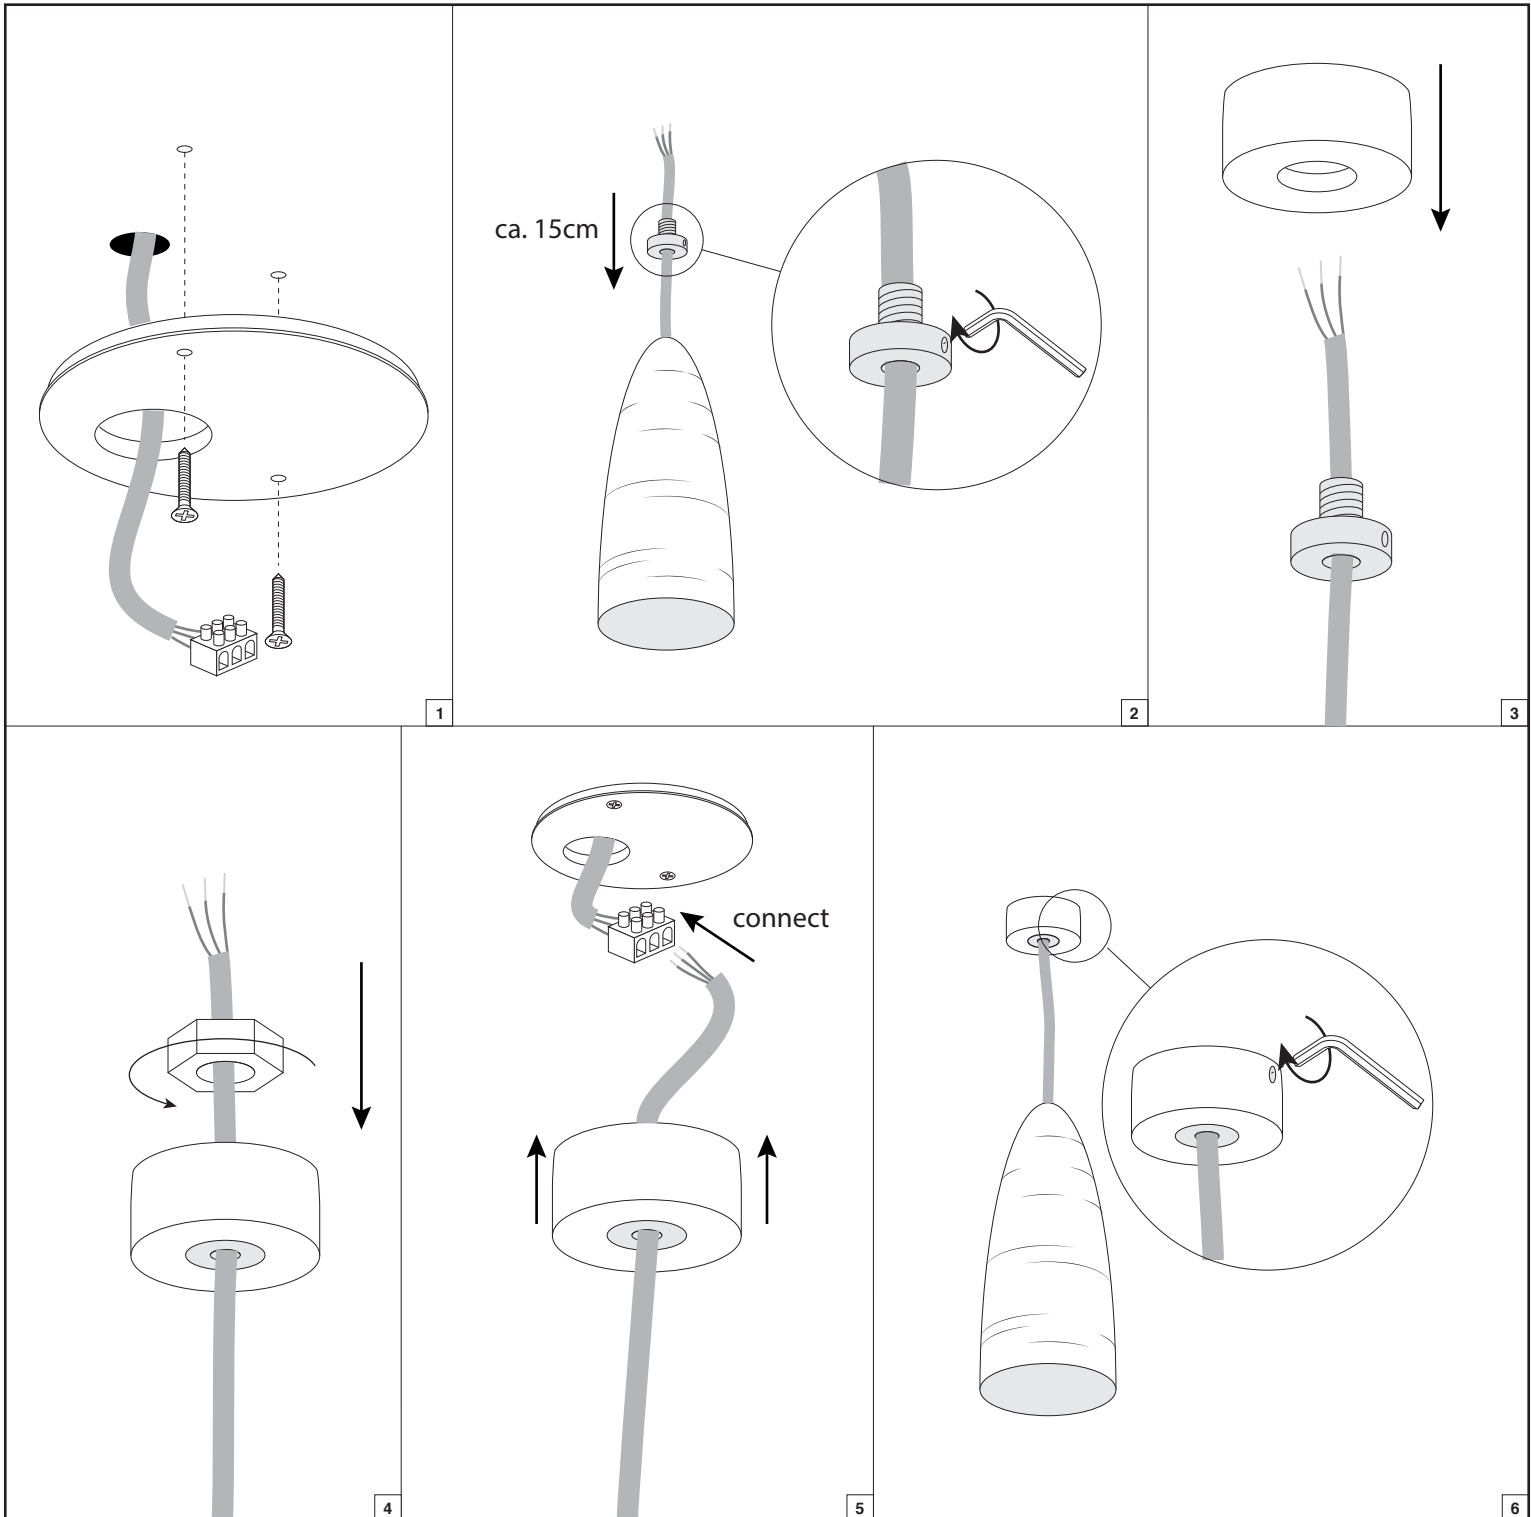

⚠ Attention!!

Be very careful with LEDs when working on product!
 Do not touch LED surface. Do not let tools come in contact with LED surface. Warranty void if LED contact has taken place.

Only to be installed by a qualified electrician.
 Always make sure power is completely switched off when working on luminaire.

Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation.

Non dim.:

N blue
 L yellow-green
 L brown

1-10V dim.:

N blue
 L yellow-green
 L brown
 1-10V + black
 1-10V - grey

Touchdim / Push:

N blue
 L yellow-green
 L brown
 Push btn black
 grey

DALI:

N blue
 L yellow-green
 L brown
 DALI + black
 DALI - grey