

Freeliner Linear


Instructions:

- A1 Disassemble ceiling piece.
- A2 Screw base part to ceiling at recommended location
- A3 Insert steel wire into screw part
- A4 Assemble piece
- B1 Place suspension housing piece in housing
- B2 Turn 90° to fix inside rim
- B3 Place safety fixation
- B4 Insert steel wire
- B5 Height can be adjusted by pressing on top of the gripper.
Excess wire can be cut off
- 1 Remove magnetic end caps
- 2 Untighten 2 screws on each end
- 3 Remove housing from bracket
- 4 Pull cable through bracket and fix bracket to ceiling using screws
- 5 Pull luminaire cable through cover. If necessary, shorten power cable. Be careful not to cut into wiring.
- 6 Place strain relief
- 7 Connect luminaire cable to driver. See wiring info below.
- 8 Connect 230V and dimming control wiring to terminal block
- 9 Place housing back over bracket
- 10 Tighten 2 screw on each end
- 11 Place magnetic end caps back

DOXIS
LIGHTING FACTORY




Suspension ceiling part

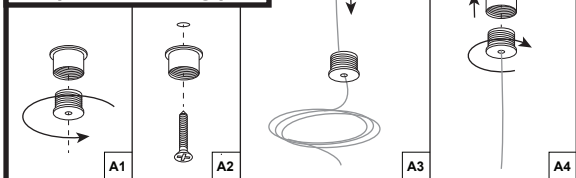


Please Make sure profile is positioned level

Suspension luminaire part

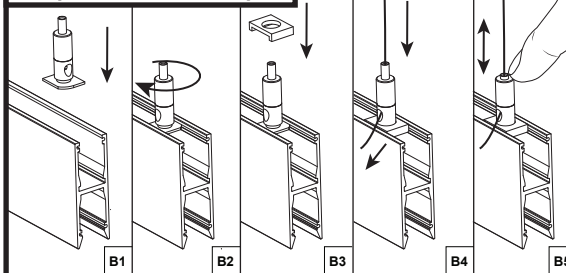

Doxis Lighting Factory cannot be held responsible for damage caused by incorrect installation.

Driver box

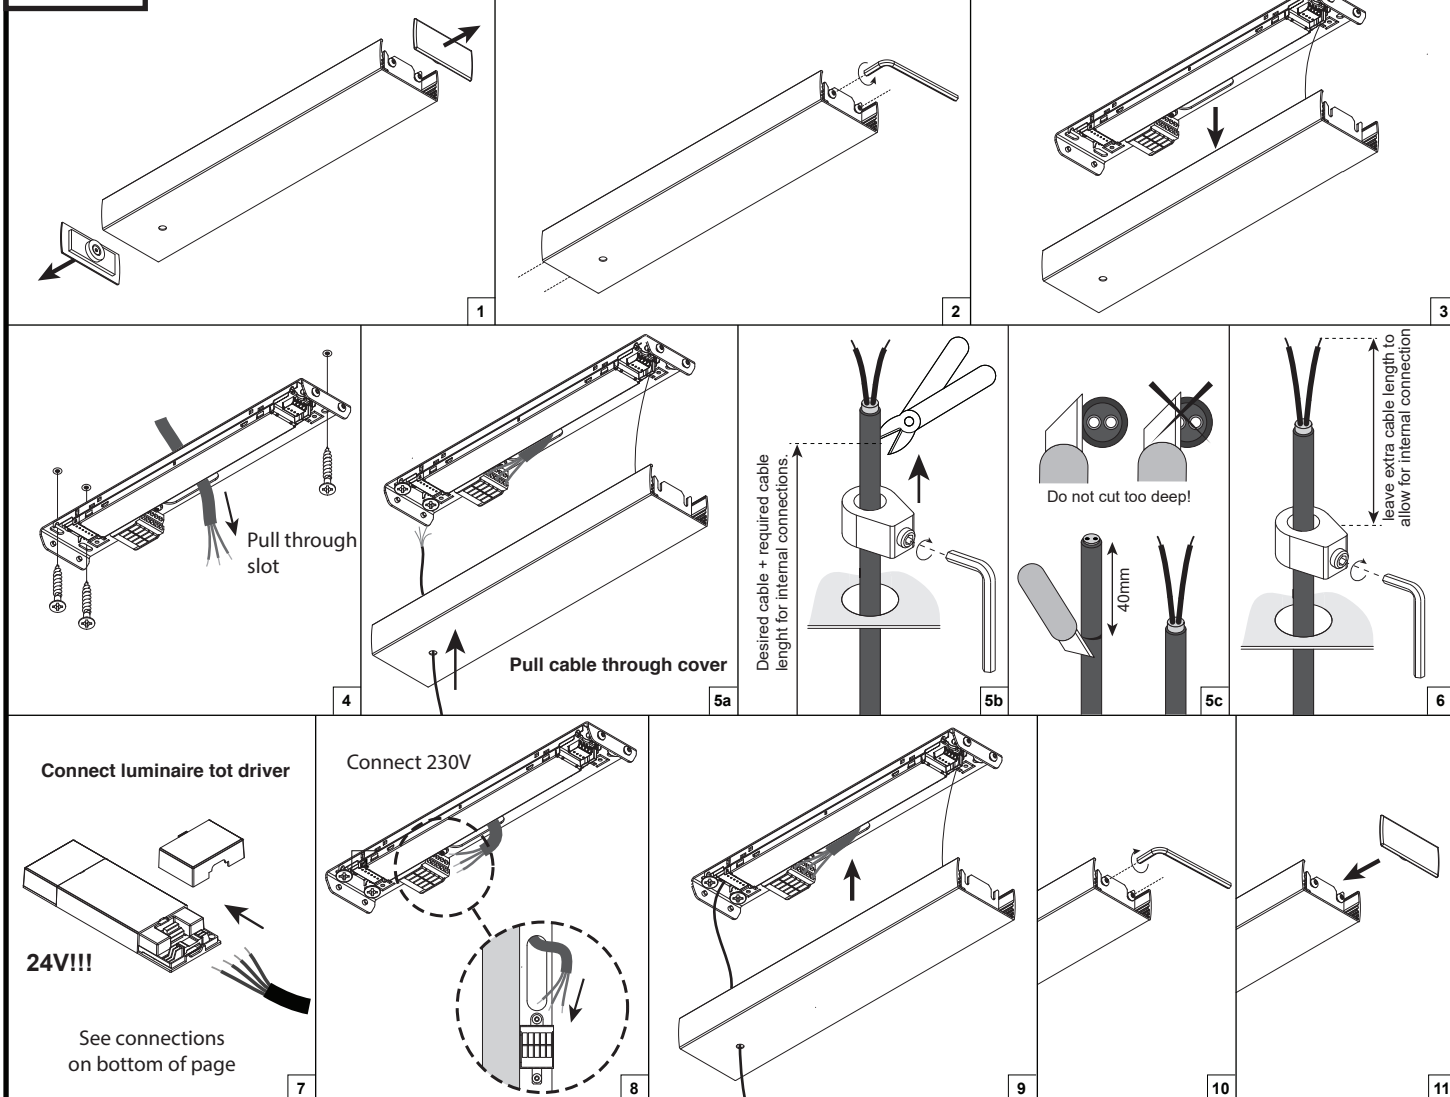

⚠ Attention!!

Always follow the instructions described in this document and store this document for future reference.

Do not touch LED surface. Warranty void if LED contact has taken place.
Only to be installed by a qualified electrician.

Always make sure power is completely switched off when working on luminaire.

Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation, modification, reparation or incorrect application/usage of the product.



*ONLY CONNECT TO 24V DRIVER

Circuit down 24V + (Positive): Brown

Circuit down 24V - (negative): Blue / Yellow-Green with black sleeve

Circuit up 24V + (Positive): Black

Circuit down 24V - (negative): Gray