

**Instructions**

**Place suspension wire-locks**

- A. Disassemble ceiling fixation
- B. Mount top part to ceiling
- C. Pull steel wire trough bottom part
- D. Reassemble fixation with steel wire hanging out

**Hang luminaire from wire locks**

- E. Put wires into wire locks and adjust height by pushing in the wire-entrance

**Connect power**

- F. Disassemble mounting box
- G. Fasten mounting piece with screws
- H. Fasten strain relief
- I. Place strain relief / connect 230V
- J. Assemble mounting box

**Installing T5 tubes (only for T5 version)**

**Remove bottom plate**

Remove screw so that the bottom plate comes loose. Be careful so that the bottom plate doesn't fall

**Insert T5 tubes**

T5 tubes are placed by putting them in under an angle and straighten them once they are inside the luminaire's body. Make sure the T5 tubes are fixed in the sockets.

**Place bottom plate back**

Place bottom plate onto luminaire. Fix plate with the screw.




Forward voltages and nominal drive currents are mentioned on the label supplied with the product or can be found in the technical datasheet of the product.

Always use the correct driver.

Always install the driver according to the wiring schematics supplied with the driver.

Always check if multi-current drivers are set to the correct output current.

Doxis Lighting Factory cannot be held responsible for damage caused by using the wrong driver.

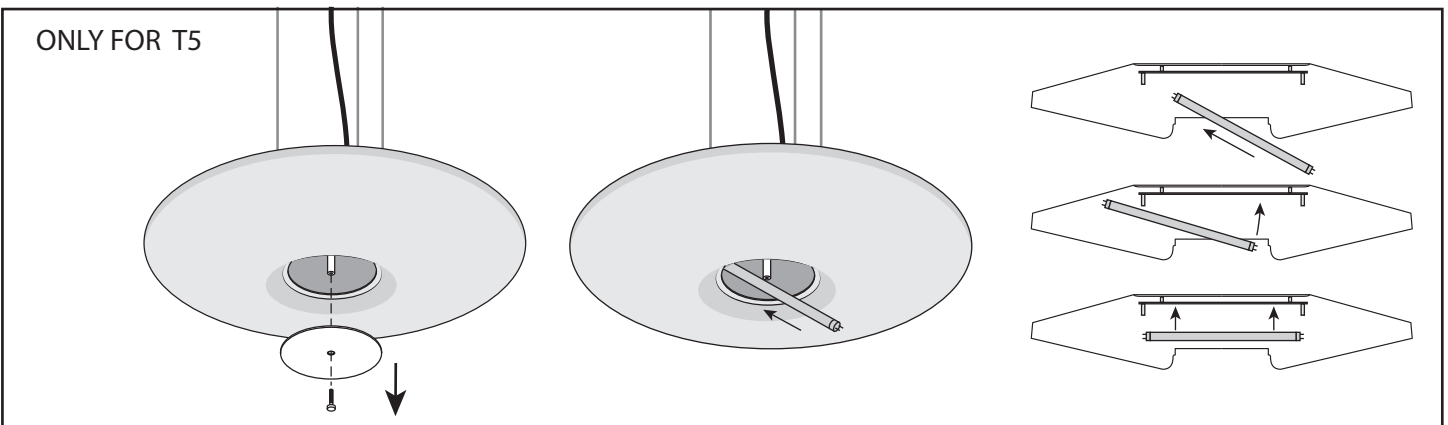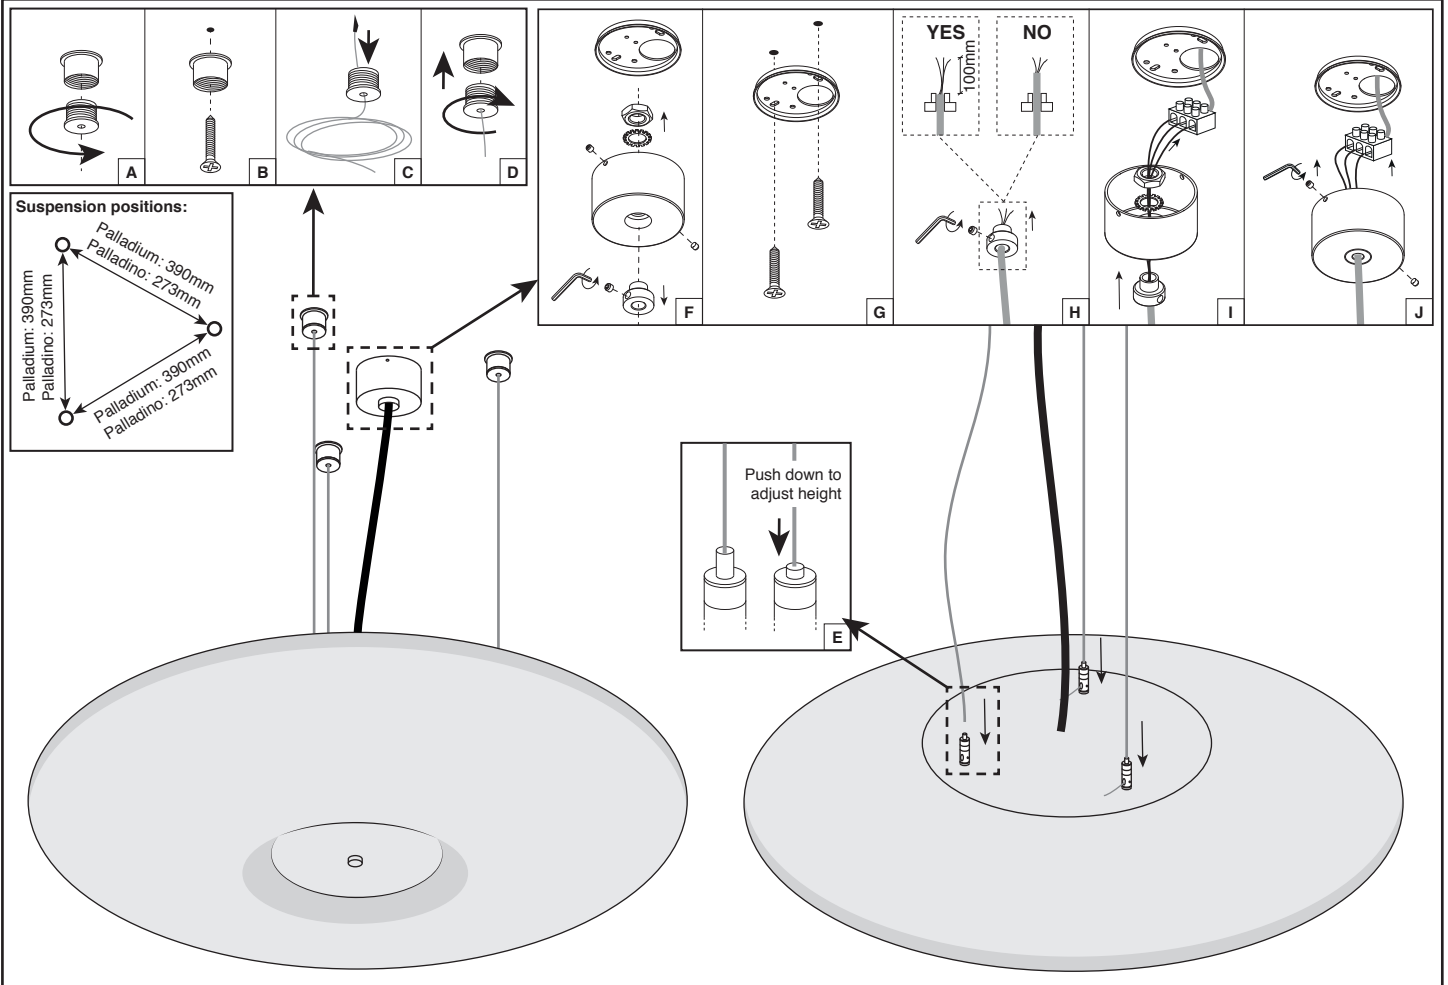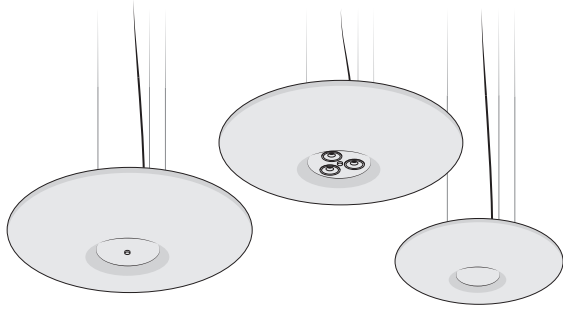

**⚠ Attention!!**

Always follow the instructions described in this document and store this document for future reference.

Do not touch LED surface. Warranty void if LED contact has taken place. Only to be installed by a qualified electrician.

Always make sure power is completely switched off when working on luminaire.

**Doxis Lighting Factory NV cannot be held responsible for any damage caused by incorrect installation, modification, reparation or incorrect application/usage of the product.**

**Non dim**

- Brown [Ⓜ] [Ⓜ] [Ⓜ] L
- Yellow-Green [Ⓜ] [Ⓜ] [Ⓜ] PE
- Blue [Ⓜ] [Ⓜ] [Ⓜ] N

**Touch & DALI dim**

- Grey [Ⓜ] [Ⓜ] [Ⓜ] DA - / N
- Black [Ⓜ] [Ⓜ] [Ⓜ] DA + / Push Btn L
- Yellow-Green [Ⓜ] [Ⓜ] [Ⓜ] PE
- Blue [Ⓜ] [Ⓜ] [Ⓜ] N
- Brown [Ⓜ] [Ⓜ] [Ⓜ] L