


# Titan Box Single (Mix)

## Surface Mounted

Type	Downlight
Mounting	Surface Mounted
Material	Aluminium
Adjustable	Yes (40°/359°)
El. class / IP	Class I / IP20
Warranty: see p.348	

<b>Bridgelux Vero 10 LED (350mA)</b>	
CCT	2700K / 3000K / 4000K
CRI	Ra90 (Ra80 on request)
SDCM	3
Luminous Flux LED	2700K - Ra90: 1100lm (124lm/W) 3000K - Ra90: 1156lm (130lm/W) 4000K - Ra90: 1172lm (132lm/W)
Luminous Flux System	2700K - Ra90: 937lm (92lm/W) 3000K - Ra90: 984lm (96lm/W) 4000K - Ra90: 998lm (98lm/W)
Beam angle	28° / 40°
LED Power	8.9W / 350mA (excl. driver)
System Power	10.2W / 350mA (incl. driver)

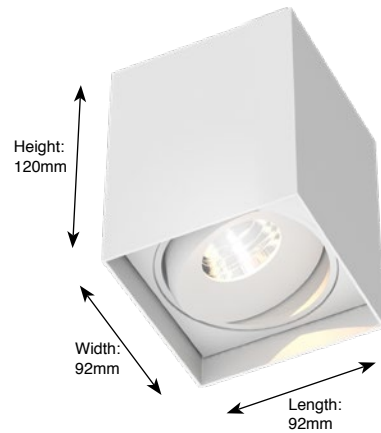


Weight: 1100g



**Ceiling mounting on horizontal ceilings only!**  
 - driver integrated in luminaire  
 - included in article number and price  
 Data sheets and wiring guide: see website

**On Request**  
 LED with CRI Ra97  
 Class A LED

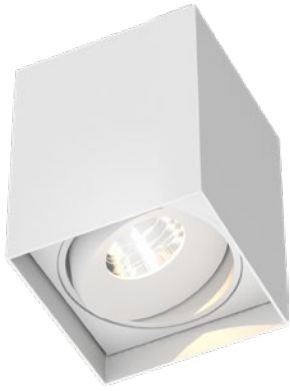

## Titan Box Single (Mix)

Cone

**PRICES INCL. BUILT-IN DRIVER**

### Non dim / Mains dim

2700K - Ra90 - 10.2W - 937lm	1413.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1413.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1413.AA.27.940.XX

### Touch & DALI dim\*

2700K - Ra90 - 10.2W - 937lm	1413.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1413.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1413.AA.26.940.XX

\*When dimming with touch. Do not combine with other touch dim products



## Titan Box Single (Mix)

Organic

**PRICES INCL. BUILT-IN DRIVER**

### Non dim / Mains dim

2700K - Ra90 - 10.2W - 937lm	1414.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1414.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1414.AA.27.940.XX

### Touch & DALI dim\*

2700K - Ra90 - 10.2W - 937lm	1414.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1414.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1414.AA.26.940.XX



## Titan Box Single (Mix)

Anti-Glare

**PRICES INCL. BUILT-IN DRIVER**

### Non dim / Mains dim

2700K - Ra90 - 10.2W - 937lm	1415.AA.27.927.XX
3000K - Ra90 - 10.2W - 984lm	1415.AA.27.930.XX
4000K - Ra90 - 10.2W - 998lm	1415.AA.27.940.XX

### Touch & DALI dim\*

2700K - Ra90 - 10.2W - 937lm	1415.AA.26.927.XX
3000K - Ra90 - 10.2W - 984lm	1415.AA.26.930.XX
4000K - Ra90 - 10.2W - 998lm	1415.AA.26.940.XX

28° Reflector: 0000.28.00.000.00  
40° Reflector: 0000.40.00.000.00

Available colors: 0000.00.00.000.XX  
Other RAL colors on request

01



White Matt Text.  
Standard

18



Grey Matt Text.  
Standard

03



Black Matt Text.  
Standard

25



Smoked Brown Text. Black + Gold Matt  
Standard

11

