

Tunnel Round

Type Lounge
 Mounting Suspended
 Material Polycarbonate (850°C)
 Aluminium Powdercoated end plates
 E.I. class / IP Class I / IP20
 Warranty: see p.348

Module Tunnel 600 - Philips Fortimo LED Line HV

Luminous Flux 3000K - Ra80: 4832lm (163lm/W)
 LED 4000K - Ra80: 5200lm (176lm/W)
 Luminous Flux 3000K - Ra80: 3983lm (113lm/W)
 System 4000K - Ra80: 4286lm (122lm/W)
 LED power 29.6W (excl. driver)
 System power 35.2W (incl. driver)

Module Tunnel 900 - Philips Fortimo LED Line HV


Luminous Flux 3000K - Ra80: 7248lm (163lm/W)
 LED 4000K - Ra80: 7800lm (176lm/W)
 Luminous Flux 3000K - Ra80: 5976lm (113lm/W)
 System 4000K - Ra80: 6430lm (122lm/W)
 LED power 44.4W (excl. driver)
 System power 52.9W (incl. driver)

Module Tunnel 1200 - Philips Fortimo LED Line HV

Luminous Flux 3000K - Ra80: 9664lm (163lm/W)
 LED 4000K - Ra80: 10400lm (176lm/W)
 Luminous Flux 3000K - Ra80: 7966lm (113lm/W)
 System 4000K - Ra80: 8573lm (122lm/W)
 LED power 59.2W (excl. driver)
 System power 70.5W (incl. driver)

Suspension set (included):

- White ceiling box
- Integrated strain relief
- Two steel suspension wires
- 230V White textile supply cable

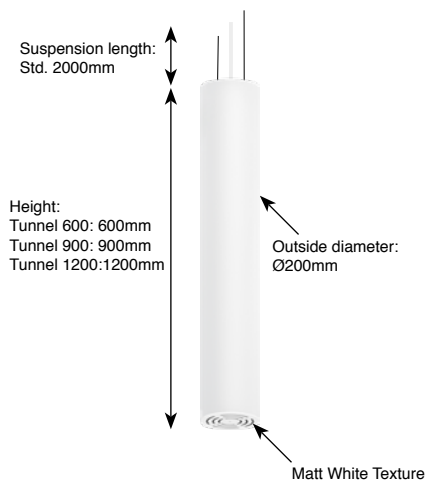

Options

Suspension + Power cable 4000mm

Suspension + 3x0.75mm² 102.23.01-4
 Suspension + 5x0.75mm² 102.25.01-4

On request

Recessed connecting box (more info on p.340/p.346)
 Trimless connecting box (more info on p.340/p.346)



Tunnel 600 LED

Round

Philips Fortimo LED Line 5200lm

3000K - Ra80 - Non dimmable	317.5000.830.01
3000K - Ra80 - 1-10V dimmable	317.5000.830.01-D
3000K - Ra80 - Touch & DALI dim.	317.5000.830.01-TD
4000K - Ra80 - Non dimmable	317.5000.840.01
4000K - Ra80 - 1-10V dimmable	317.5000.840.01-D
4000K - Ra80 - Touch & DALI dim.	317.5000.840.01-TD



Tunnel 900 LED

Round

Philips Fortimo LED Line 7800lm

3000K - Ra80 - Non dimmable	318.7800.830.01
3000K - Ra80 - 1-10V dimmable	318.7800.830.01-D
3000K - Ra80 - Touch & DALI dim.	318.7800.830.01-TD
4000K - Ra80 - Non dimmable	318.7800.840.01
4000K - Ra80 - 1-10V dimmable	318.7800.840.01-D
4000K - Ra80 - Touch & DALI dim.	318.7800.840.01-TD



Tunnel 1200 LED

Round

Philips Fortimo LED Line 10400lm

3000K - Ra80 - Non dimmable	319.10000.830.01
3000K - Ra80 - 1-10V dimmable	319.10000.830.01-D
3000K - Ra80 - Touch & DALI dim.	319.10000.830.01-TD
4000K - Ra80 - Non dimmable	319.10000.840.01
4000K - Ra80 - 1-10V dimmable	319.10000.840.01-D
4000K - Ra80 - Touch & DALI dim.	319.10000.840.01-TD



Tunnel Round - Interior



Tunnel Square - Top



Tunnel Square - Ceiling connecting box



Tunnel Round - Top



Tunnel Round - Ceiling connecting box

